


2700 BOTTOM SASH REMOVAL


CRYSTAL WINDOW & DOOR SYSTEMS
31-10 WHITESTONE EXPWY.
FLUSHING NY 11354
TEL. 718.961.7300

PAGE 1 OF 4

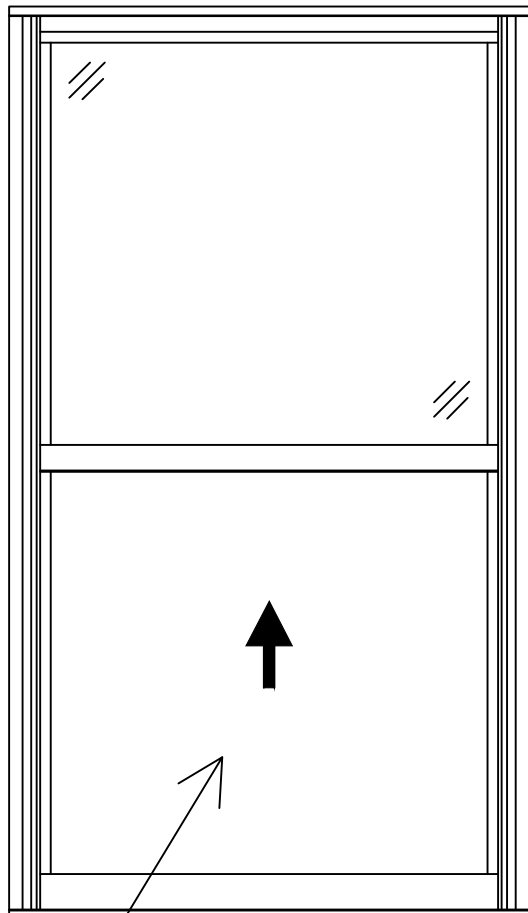


1. PULL BOTTOM SASH UP
UNTIL ANTI-BOW
HOOKS CLEARED OFF

2. LOOSEN SECURE SCREWS AT
BOTH TILT LATCHES
WITH SPECIAL KEY
UNTIL SCREW HEAD CLEARED
OFF TILT LATCH SLOT

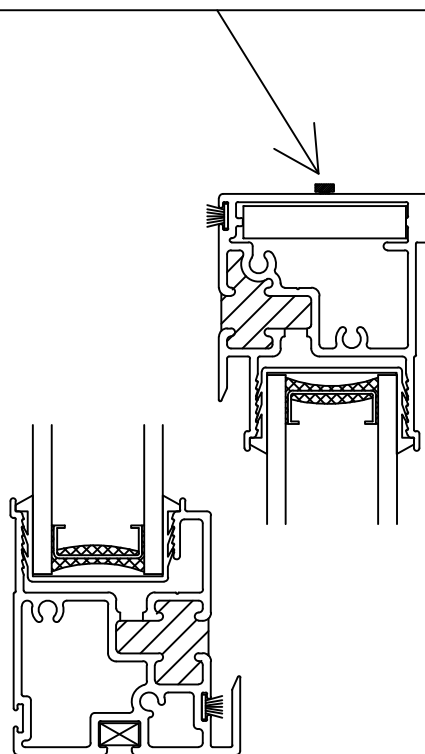


3. SQUEEZE TILT LATCHES IN,


4. TILT SASH IN BY 90 DEGREES



5. LOOSEN UP PIVOT BAR SCREW
ON ONE SIDE
SLIDE PIVOT BAR IN

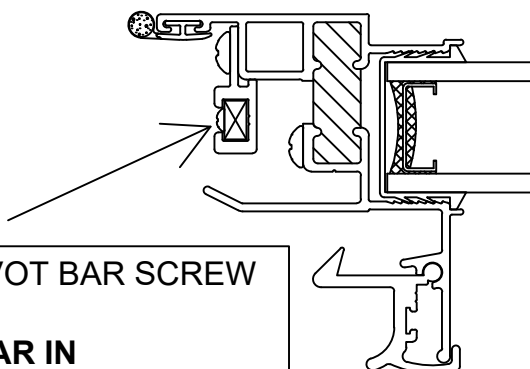

6. ROTATE SASH A LITTLE,
SLIDE SASH TO THE SIDE TO CLEAR OFF
OTHER PIVOT BAR

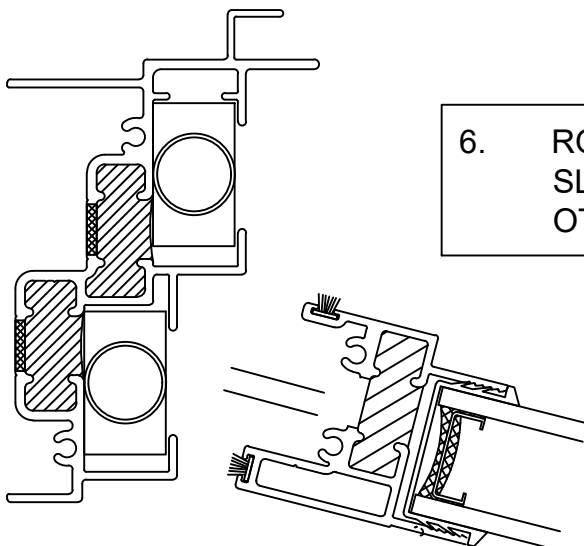


7. INSTALL BOTTOM SASH BACK
IN THE OPPOSITE
ORDER OF OPERATIONS


2700 TOP SASH REMOVAL

CRYSTAL WINDOW & DOOR SYSTEMS
31-10 WHITESTONE EXPWY.
FLUSHING NY 11354
TEL. 718.961.7300


PAGE 3 OF 4

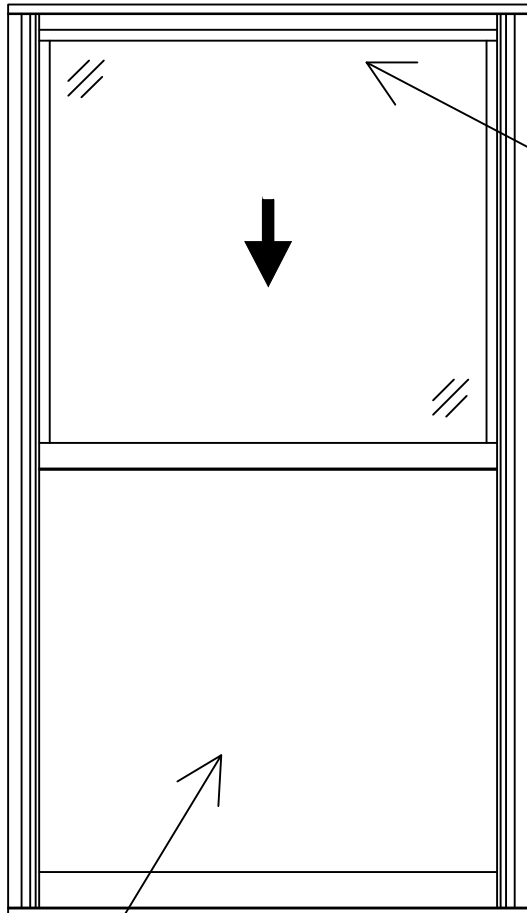


1. REMOVE BOTTOM SASH

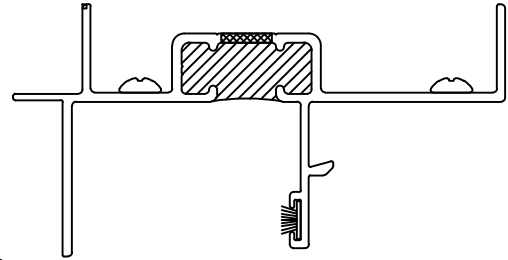

2. PULL TOP SASH DOWN
UNTIL ANTI-BOW
HOOKS CLEARED OFF

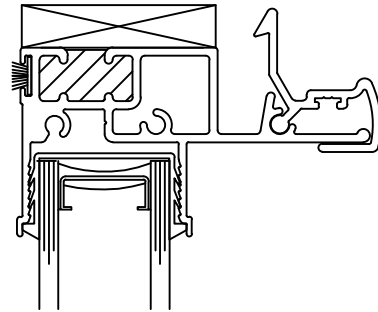

3. SQUEEZE TILT LATCHES IN,
TILT SASH A LITTLE,
PULL SASH UP

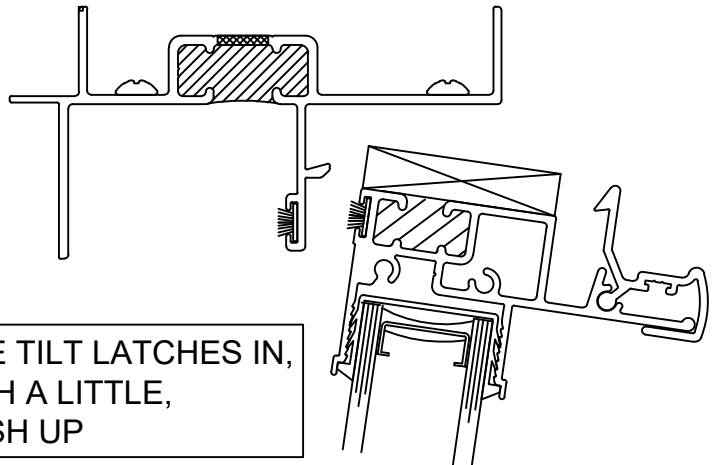


2700 TOP SASH REMOVAL



CRYSTAL WINDOW & DOOR SYSTEMS
31-10 WHITESTONE EXPWY.
FLUSHING NY 11354
TEL. 718.961.7300

PAGE 4 OF 4

4. TILT SASH IN BY 90 DEGREES

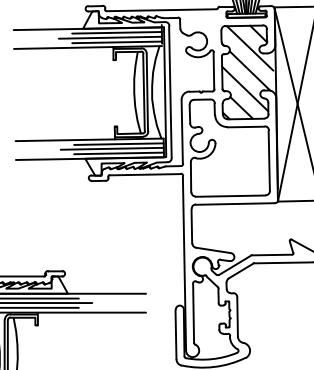

5. LOOSEN UP PIVOT BAR SCREW
ON **RIGHT SIDE FROM INTERIOR**,
SLIDE PIVOT BAR IN

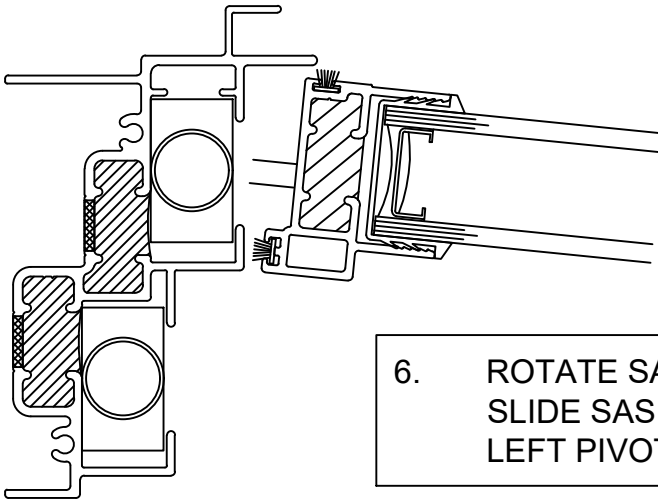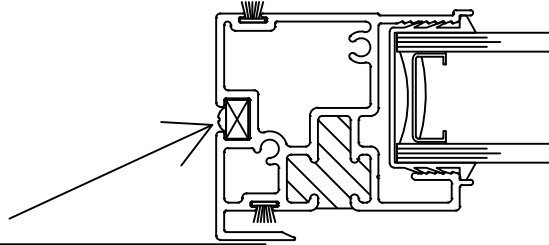

6. ROTATE SASH CLOCKWISE A LITTLE,
SLIDE SASH TO THE RIGHT TO CLEAR OFF
LEFT PIVOT BAR

7. INSTALL TOP SASH BACK IN THE OPPOSITE
ORDER OF OPERATIONS