

SERIES 800 SINGLE HUNG

TEST SIZE W x H	AAMA RATING	AIR INFILTRATION	DESIGN PRESSURE	WATER RESISTANCE	U-VALUE	SHGC	VT
48" x 84"	LC-PG35	≤30 cfm/ft ²	35 psf	5.43 psf	0.25-0.47	0.21-0.64	0.46-0.67
44" x 72"	R-PG50	≤30 cfm/ft ²	50 psf	7.52 psf	0.25-0.47	0.21-0.64	0.46-0.67
48" x 96" (ORIEL)	LC-PG35	≤30 cfm/ft ²	35 psf	7.52 psf	0.25-0.47	0.21-0.64	0.46-0.67

TABLE OF CONTENT


- INTRODUCTION -P1
- SECTION DETAILS -P2-P4
- ACCESSORY OPTIONS -P5-P9

FEATURES


- 2-7/8" FRAME DEPTH
- 3/4" INSULATED GLASS
- LOW-E COATING AND ARGON FILLED IGU
- FUSION WELDED FRAME
- INTEGRAL NAILING FIN
- MEETING RAIL LOCK
- TILT-IN SASH WITH RAISED TILT LATCH
- CONTINUOUS LIFT HANDLE ON BOTTOM SASH
- SLOPED SILL
- CONSTANT FORCE COIL BALANCE
- TRIPLE-SEAL WEATHERSTRIPPING AT SILL
- HALF SCREEN

OPTIONAL SELECTIONS


- BLACK AND BRONZE CAPSTOCK
- ADA LOCK
- WOCD LOCK
- GRIDS
- VENT LOCK
- OTHER OPTIONAL ACCESSORIES

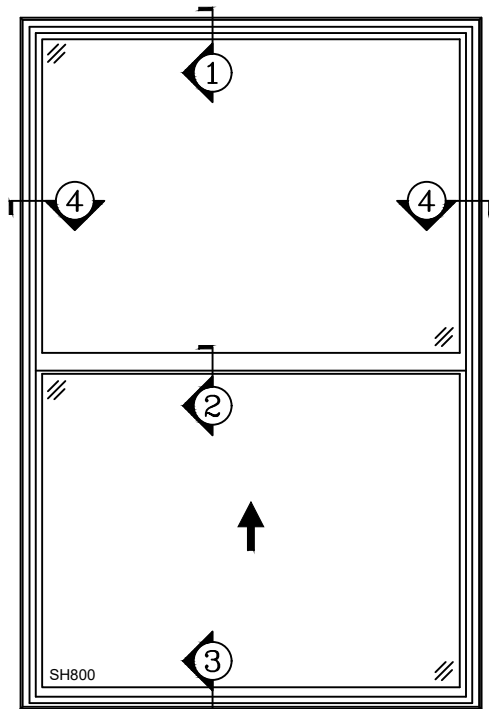


800 SINGLE HUNG

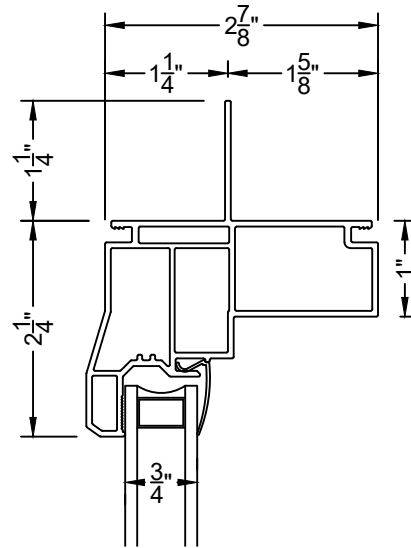


① HEAD
SH800

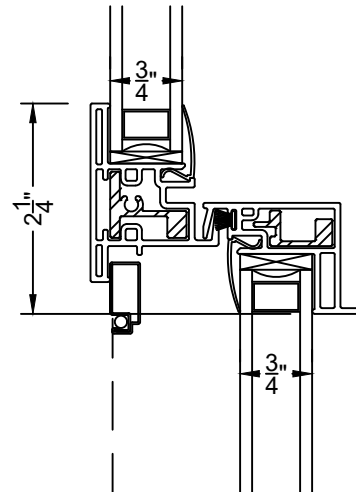


② MEETING RAIL
SH800

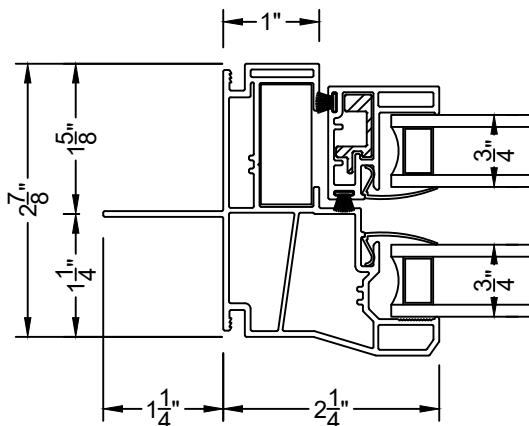


④ JAMB
SH800

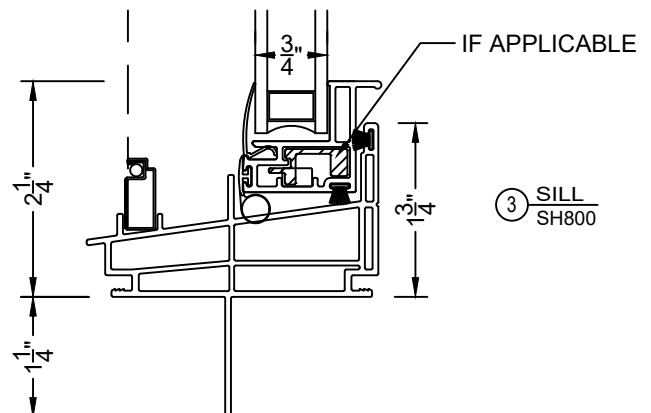


③ SILL
SH800

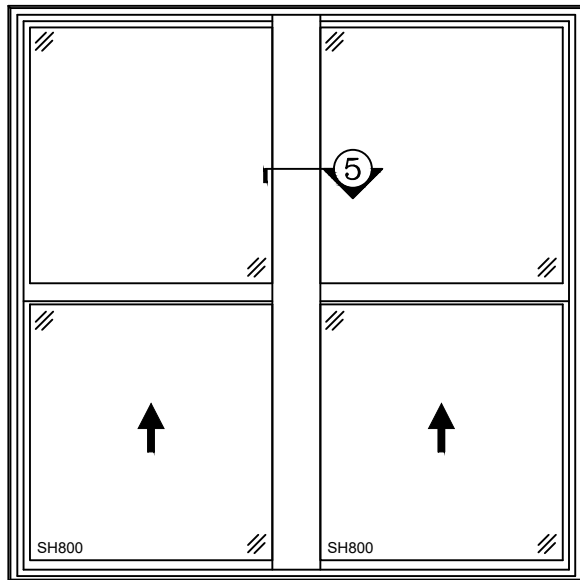


TWIN SH800

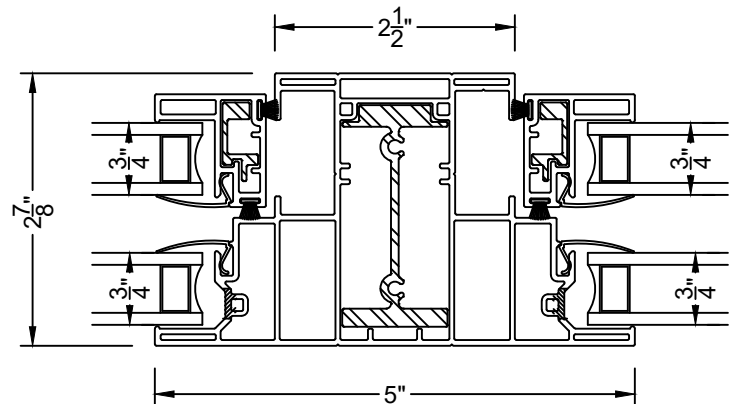


⑤ INTERMEDIATE JAMB
SH800

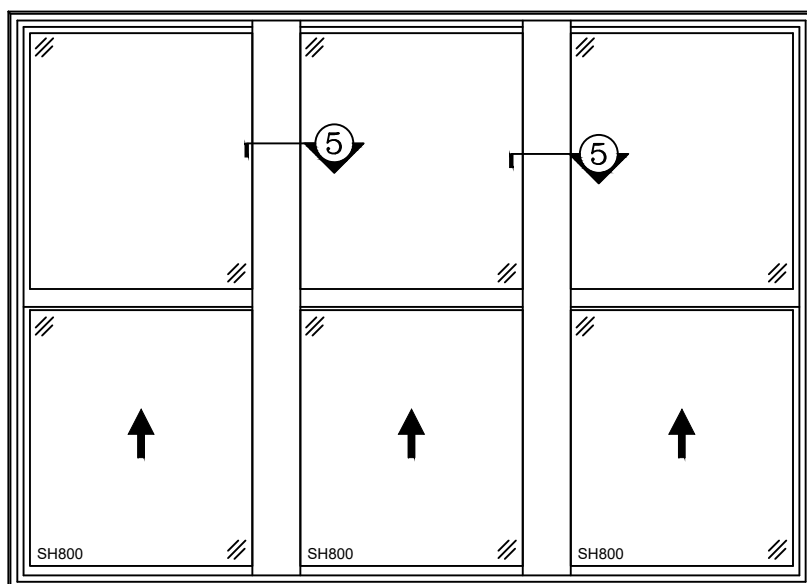


TRIPLE SH800

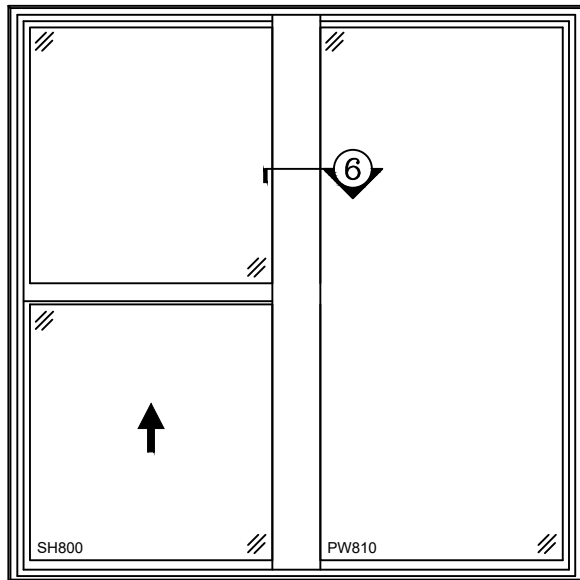


TWIN SH800/PW810

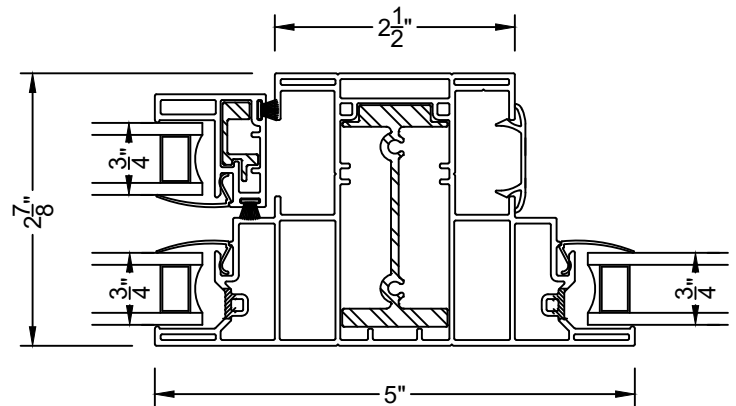


⑥ INTERMEDIATE JAMB
SH800/PW810

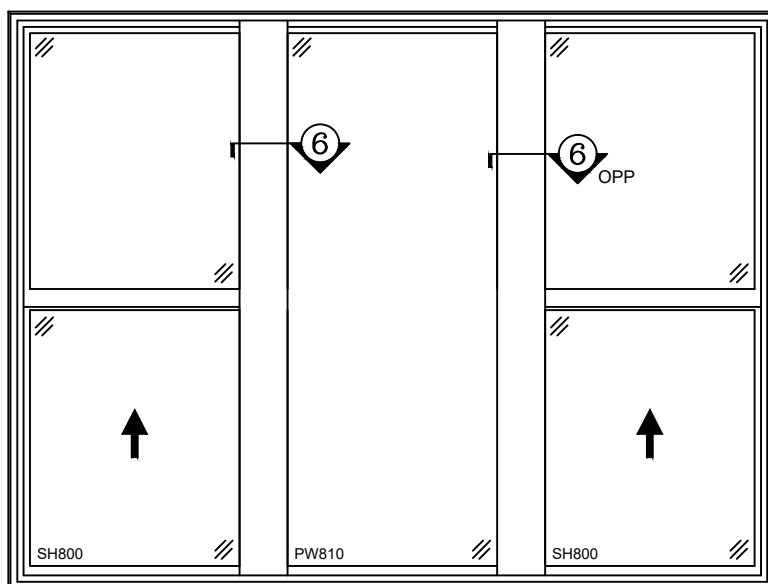

TRIPLE SH800/PW810

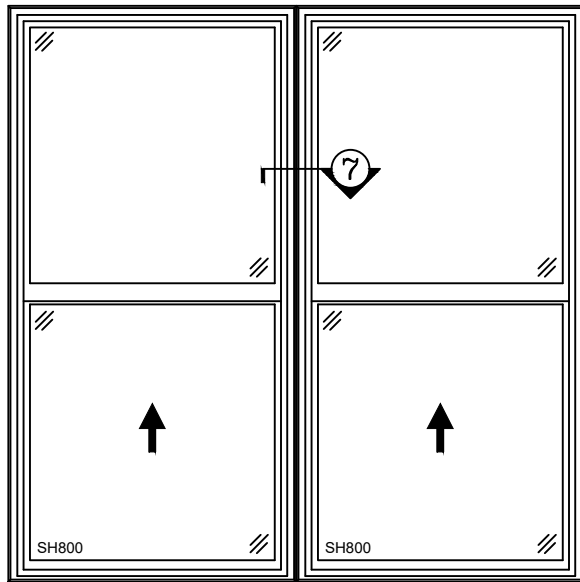


TWIN SH800 - SH800

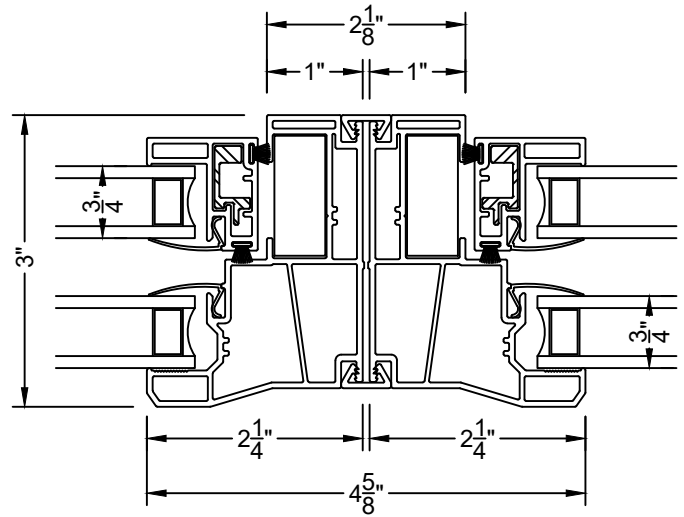


(7) MULLION (0 DEGREE)
SH800-SH800

AF15 SNAP-ON BRICKMOULD


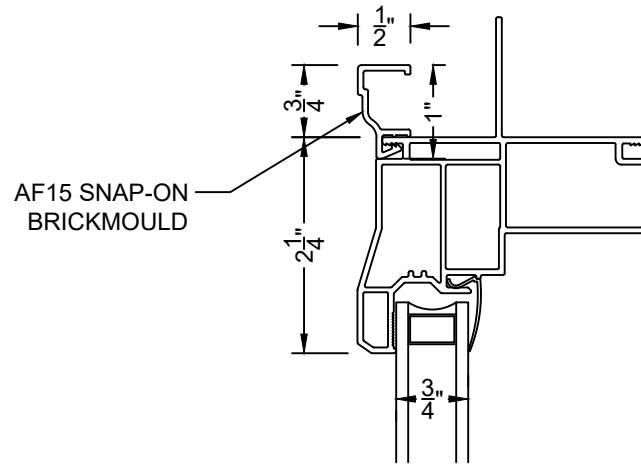


①A HEAD
SH800


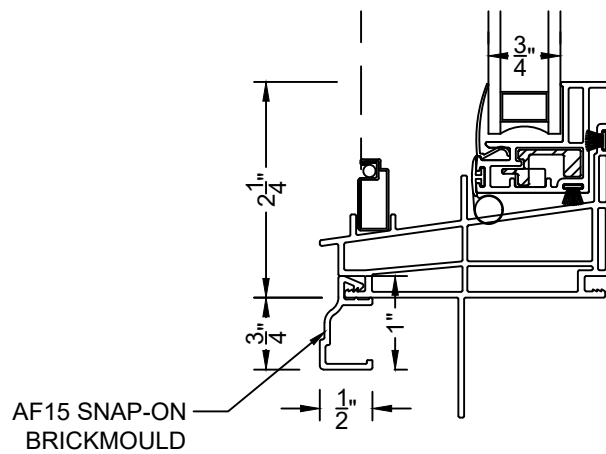


③A SILL
SH800



AF40 1/2" DRYWALL RETURN

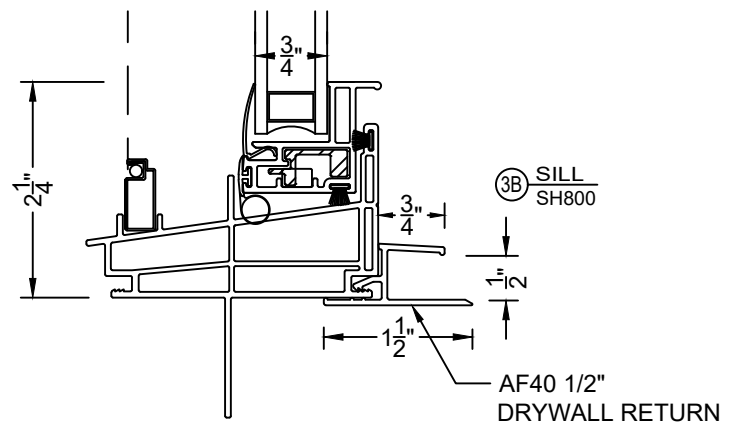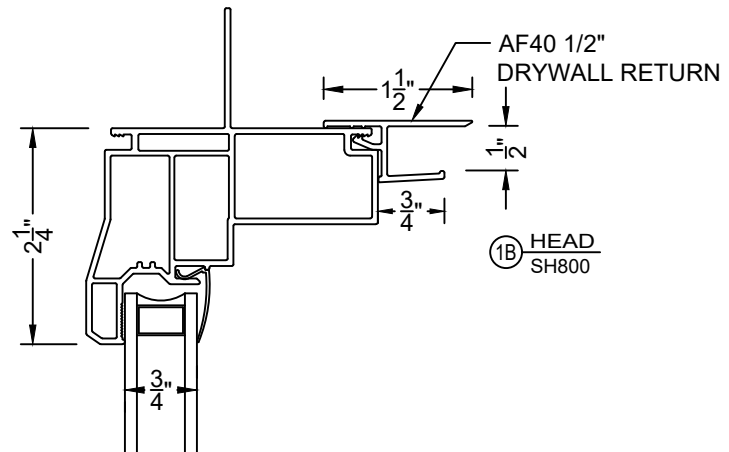

XF08 LINER CLIP FOR EXTENSION JAMB

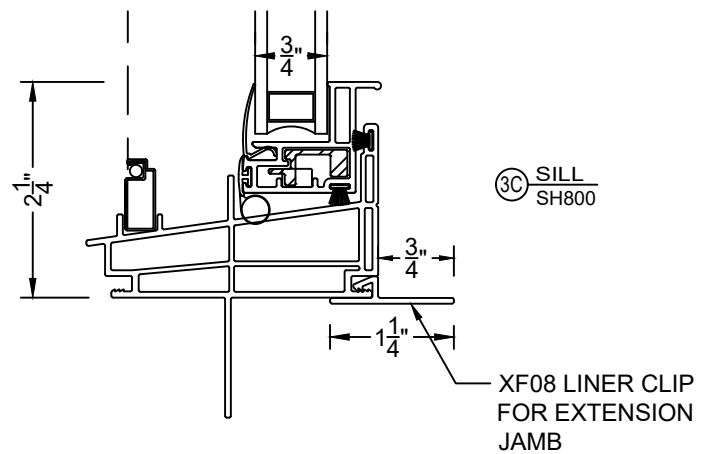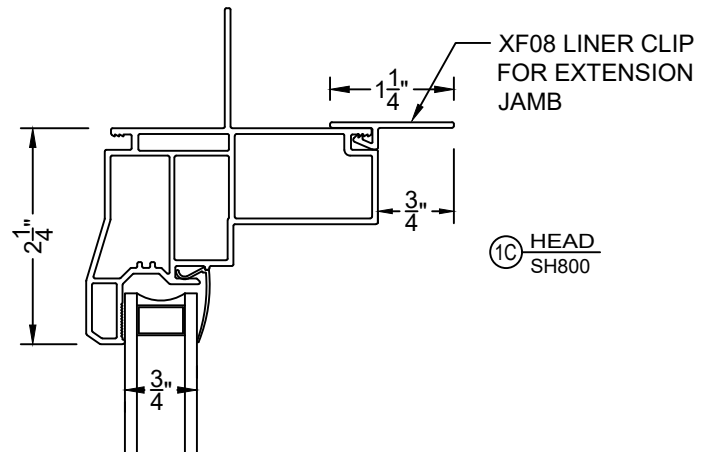

UV45 HEAD EXPANDER & XF12 SILL EXTENSION

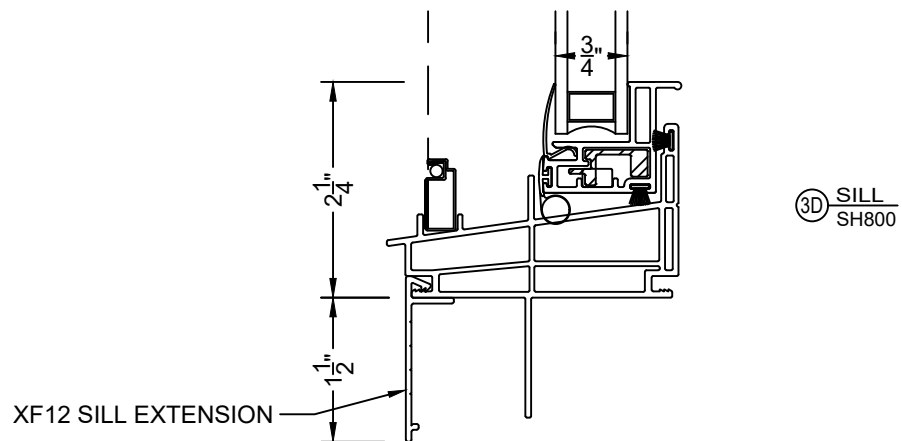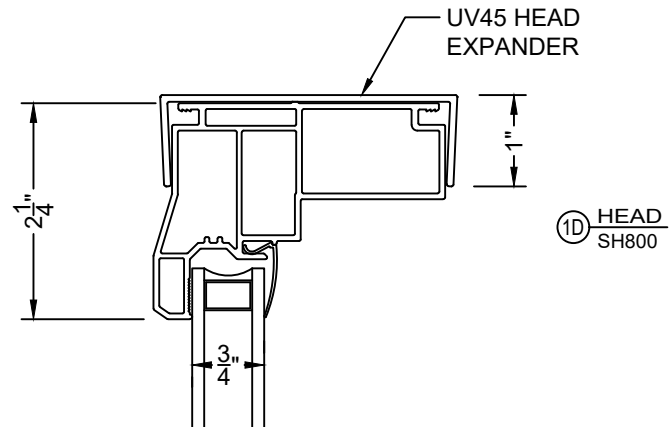

AF0083 J CHANNEL / FLORIDA FLANGE
(AF66 FLORIDA FLANGE no nub)

