

## SERIES 800 SINGLE HUNG

TEST SIZE W x H	AAMA RATING	AIR INFILTRATION	DESIGN PRESSURE	WATER RESISTANCE	U-VALUE	SHGC	VT
48" x 84"	LC-PG35	≤30 cfm/ft <sup>2</sup>	35 psf	5.43 psf	0.25-0.47	0.21-0.64	0.46-0.67
44" x 72"	R-PG50	≤30 cfm/ft <sup>2</sup>	50 psf	7.52 psf	0.25-0.47	0.21-0.64	0.46-0.67
48" x 96" (ORIEL)	LC-PG35	≤30 cfm/ft <sup>2</sup>	35 psf	7.52 psf	0.25-0.47	0.21-0.64	0.46-0.67

### TABLE OF CONTENT


- INTRODUCTION -P1
- SECTION DETAILS -P2-P4
- ACCESSORY OPTIONS -P5-P9

### FEATURES


- 2-7/8" FRAME DEPTH
- 3/4" INSULATED GLASS
- LOW-E COATING AND ARGON FILLED IGU
- FUSION WELDED FRAME
- INTEGRAL NAILING FIN
- MEETING RAIL LOCK
- TILT-IN SASH WITH RAISED TILT LATCH
- CONTINUOUS LIFT HANDLE ON BOTTOM SASH
- SLOPED SILL
- CONSTANT FORCE COIL BALANCE
- TRIPLE-SEAL WEATHERSTRIPPING AT SILL
- HALF SCREEN

### OPTIONAL SELECTIONS


- BLACK AND BRONZE CAPSTOCK
- ADA LOCK
- WOCD LOCK
- GRIDS
- VENT LOCK
- OTHER OPTIONAL ACCESSORIES

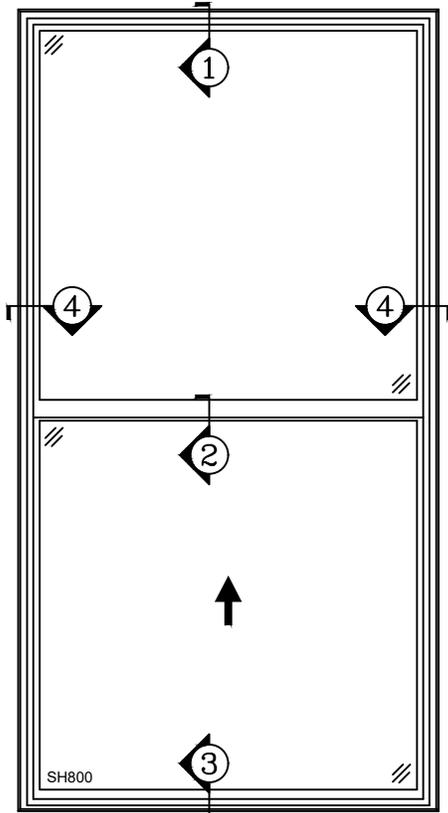


800 SINGLE HUNG

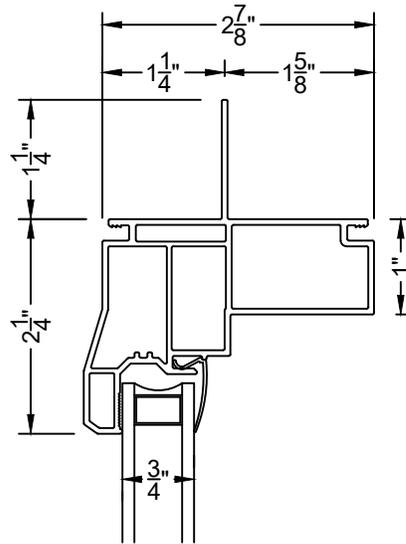


① HEAD  
SH800

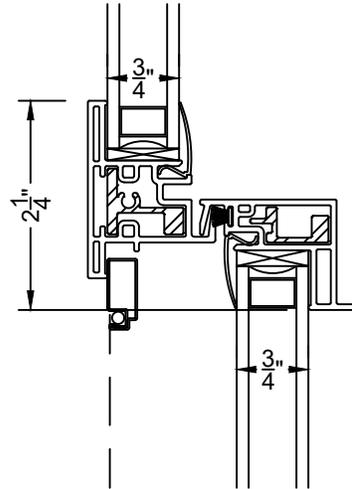


② MEETING RAIL  
SH800

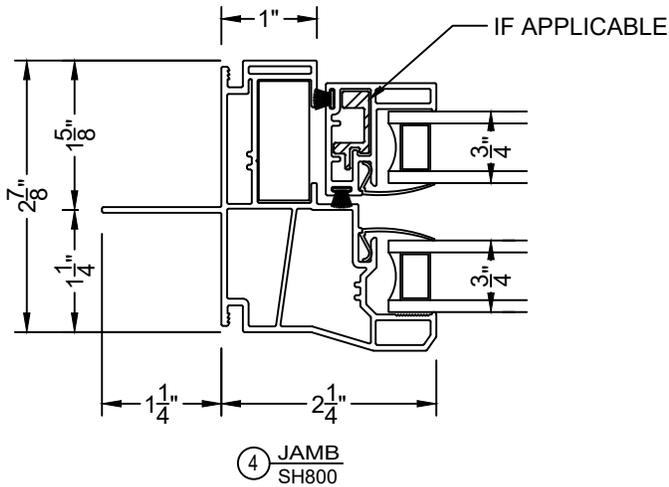


④ JAMB  
SH800

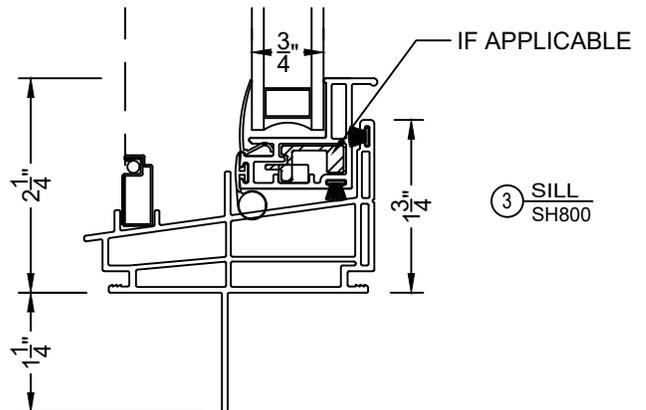


③ SILL  
SH800

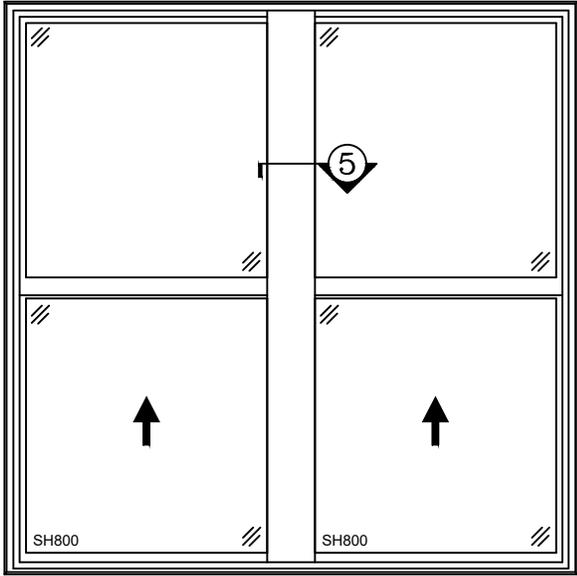

TWIN SH800

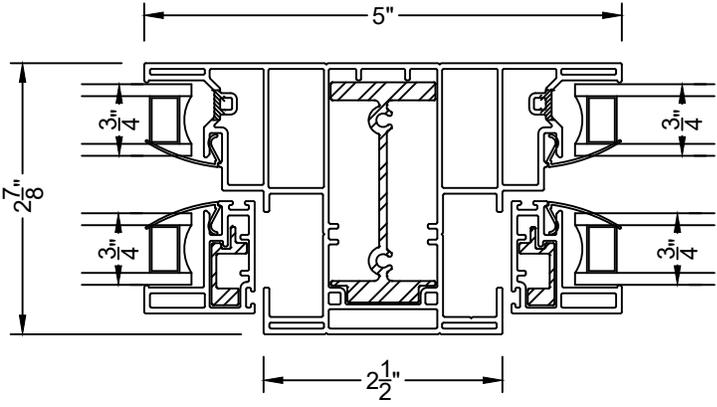


⑤ INTERMEDIATE JAMB  
SH800

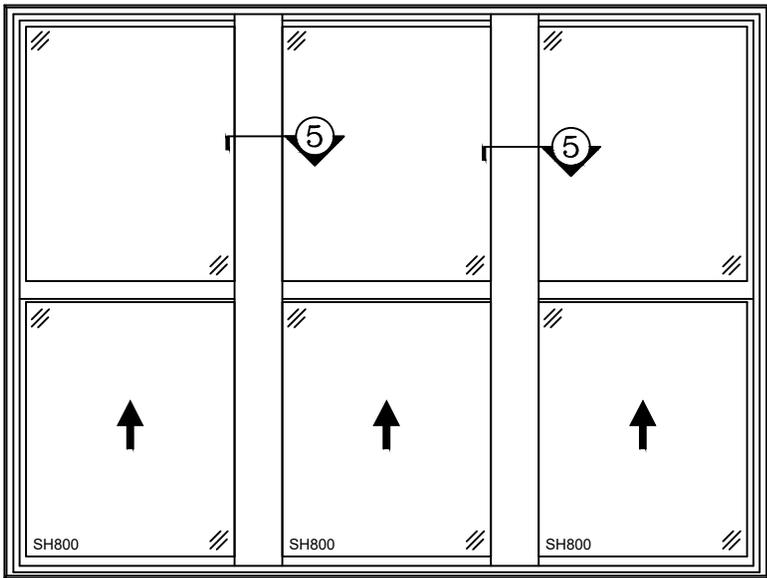


TRIPLE SH800


VER: 2026.03

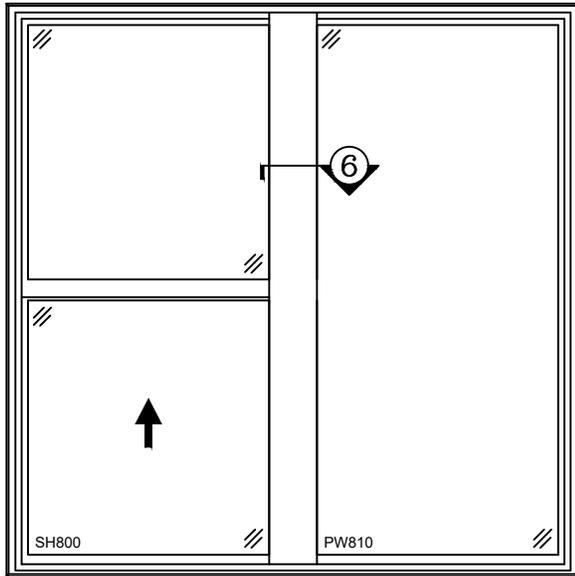

TWIN SH800/PW810

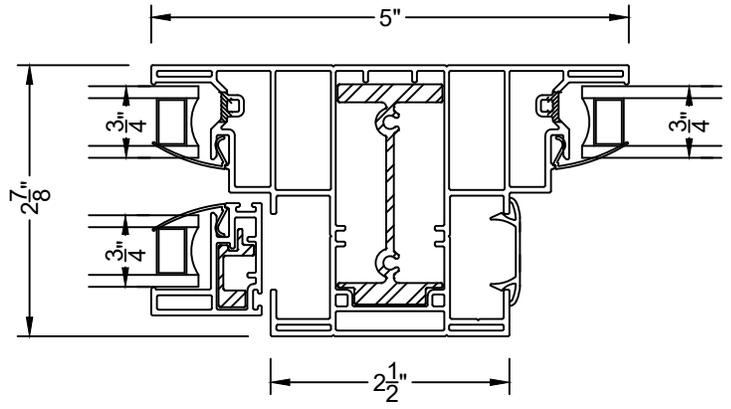



6 INTERMEDIATE JAMB  
SH800/PW810

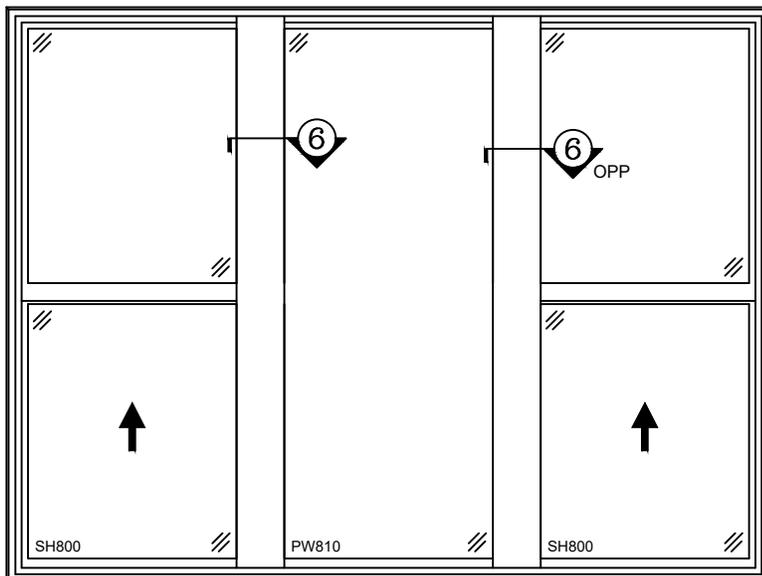



TRIPLE SH800/PW810

VER: 2026.03



## AF15 SNAP-ON BRICKMOULD

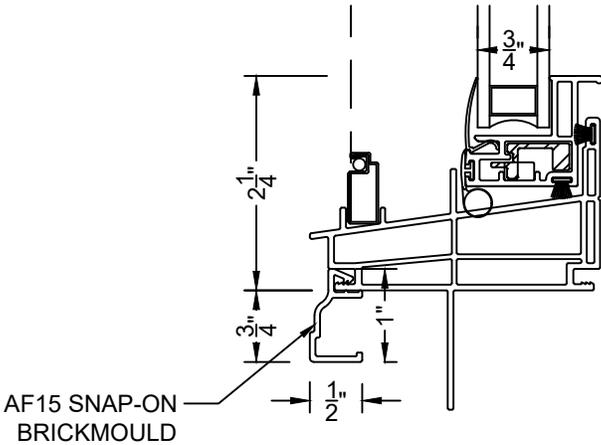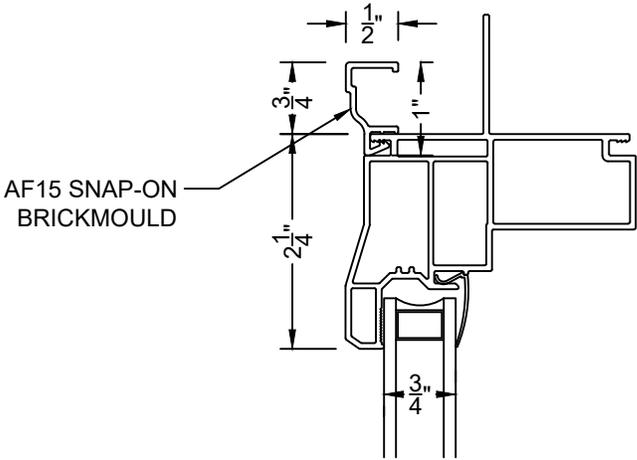


## AF40 1/2" DRYWALL RETURN

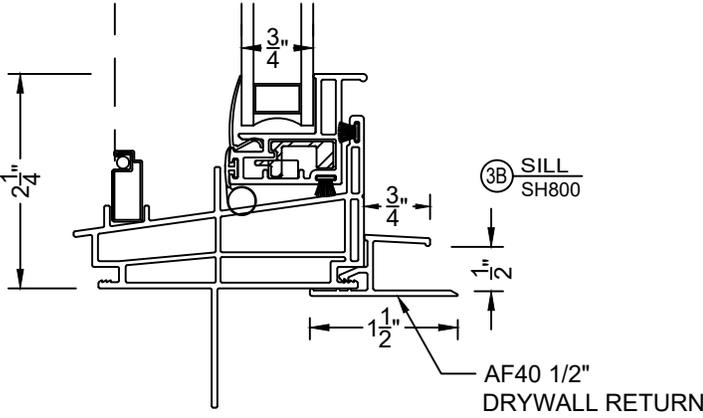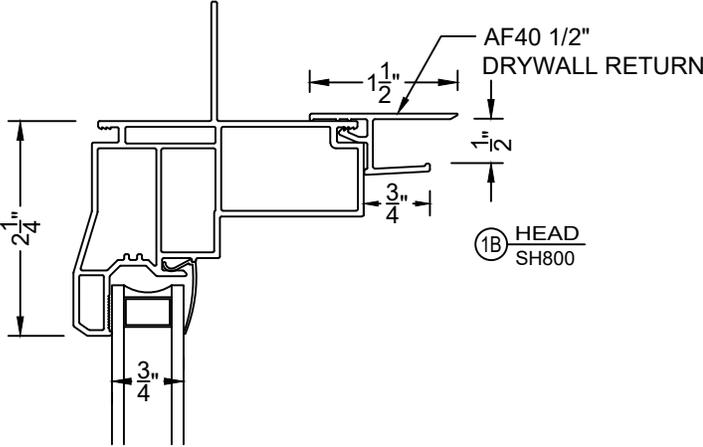


## XF08 LINER CLIP FOR EXTENSION JAMB

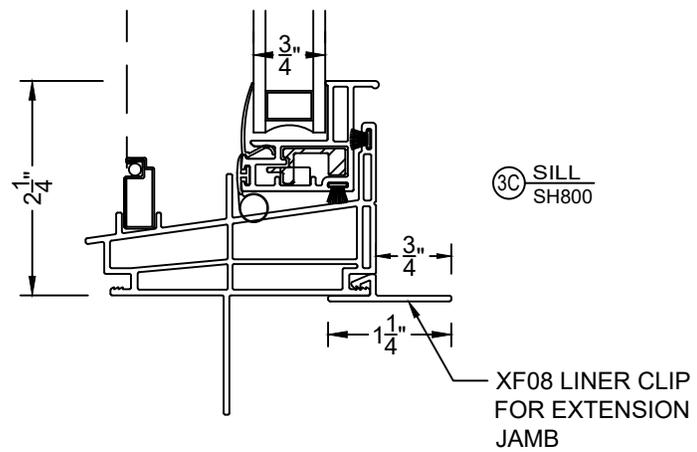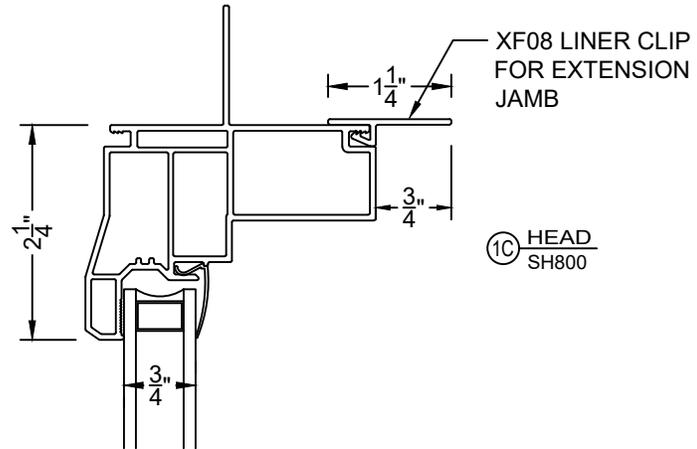

## XF12 FLUSH FIN

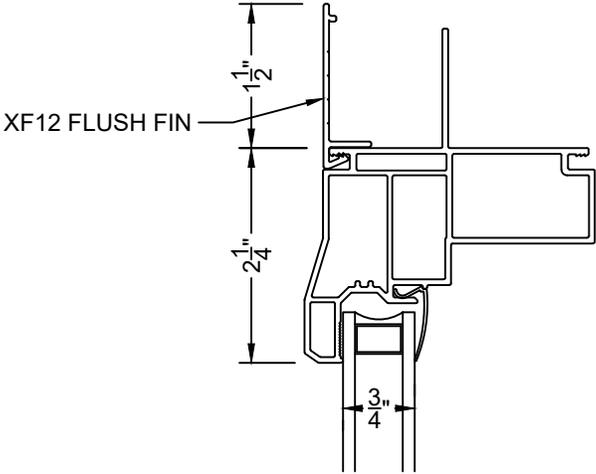


①D HEAD  
SH800

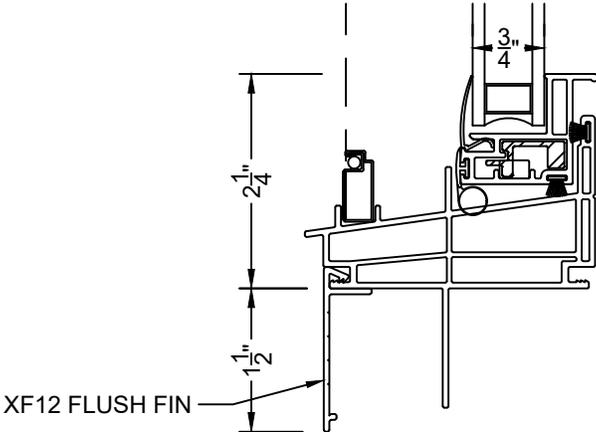


③D SILL  
SH800

## AF0083 J CHANNEL / FLORIDA FLANGE (AF66 FLORIDA FLANGE no nub)

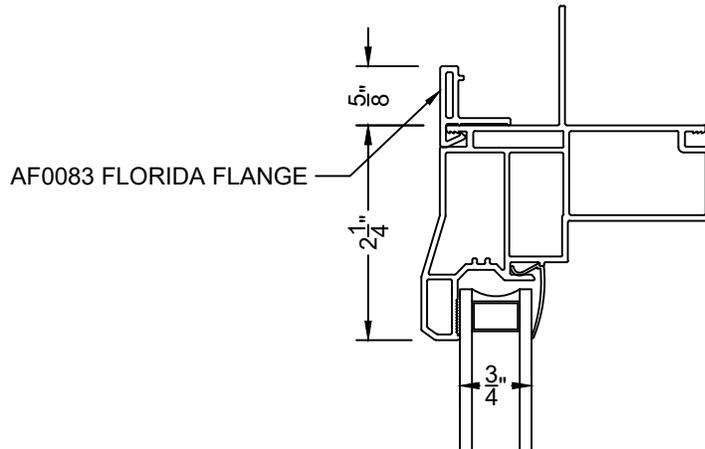

①E HEAD  
SH800

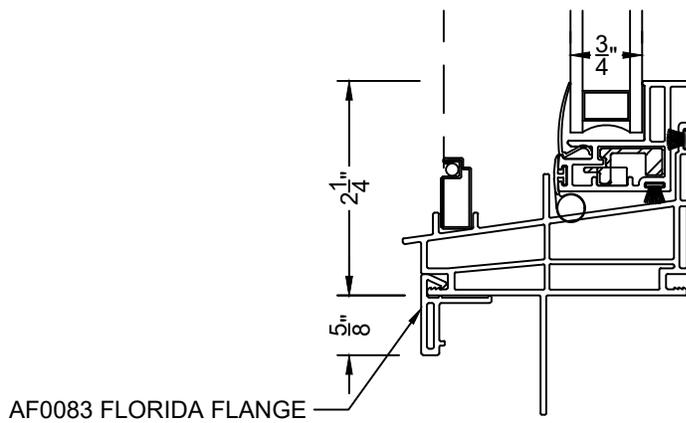

③E SILL  
SH800